



Overview

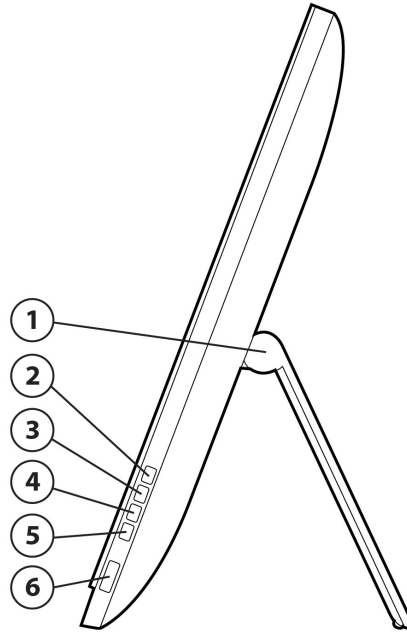

- | | | | |
|---------------------|--|----------------------------|---|
| 1. Stand | Folding easel stand provides +15 to +70° of tilt. | 4. Plus "+" | If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels. |
| 2. Menu | Opens, selects or exits the OSD menu. | 5. OK | If the OSD menu is on, press to select the highlighted menu item. |
| 3. Minus "-" | If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels. | 6. Power/ Power LED | Turns the monitor on or off. LED: fully powered = white; sleep mode = amber; sleep timer mode = flashing amber. |

Overview

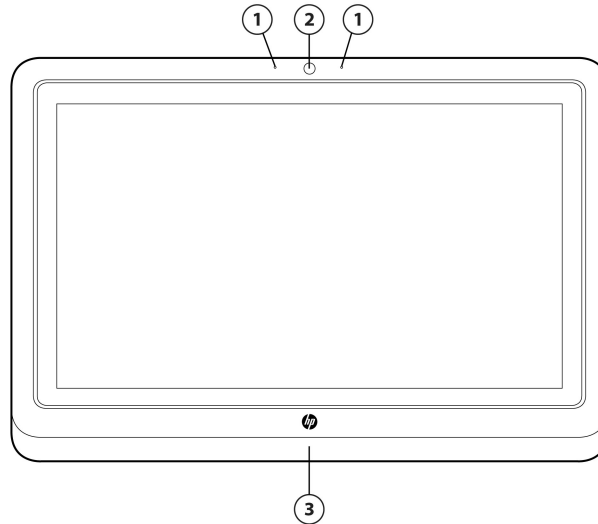

1. Microphones Dual microphones.

2. Webcam Integrated 720p webcam.

Models: E4S03AA

Introduction

Make the most of your business PC's Windows 8 environment with a fully reclining, multi-touch IPS display that puts productivity at your fingertips and keeps you comfortable throughout the day. Enjoy vibrant Full HD1 images on the extra-large 23-inch diagonal screen.

Key Benefits

- This Windows 8-certified multi-touch monitor is plug-and-play ready to support the latest touch-enabled business applications and designed to recline for a more comfortable touch experience.
- Enjoy an ideal communication experience with a display optimized for business-class collaboration with integrated speakers, webcam, and dual microphones.
- Easily connect to your platform and a range of devices with convenient DVI and DisplayPort inputs.
- Your IT investment is supported by a three-year standard limited warranty. Select optional HP Care Pack Services² to extend your protection beyond the standard warranty.
- Help lower your costs with a display that's ENERGY STAR[®] qualified and EPEAT[®] Gold registered³, with mercury free display backlights, low halogen components⁴, and arsenic-free display glass.

Technical Specifications

| | | |
|---|---|--|
| Panel | Type | Touch enabled IPS panel with LED backlighting |
| | Viewable Image Area (diagonal) | 58,42 cm (23 in) widescreen, diagonally measured |
| | Active Area (W x H) | 50,91 x 28,64 cm (20.05 x 11.28 in) |
| | Aspect Ratio | 16:9 |
| | Viewing Angle (typical)* | Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio) |
| | Brightness (typical)* | 220 cd/m ² (Adjusted for touchscreen cover glass) |
| | Static Contrast Ratio (typical)* | 1000:1 |
| | Dynamic Contrast Ratio (typical)* | 10,000,000:1 |
| | Response Time (typical)* | 7 ms (gray to gray with overdrive) |
| | Pixel Pitch | 0.265 mm |
| | Backlight Lamp Life (to half brightness)* | 30,000 hours minimum |
| | Color Gamut (typical)* | 72% |
| | Color Support** | Can display up to 16.7 million colors |
| | <p>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. ** With the use of FRC technology.</p> | |
| On Screen Display (OSD) Controls | Buttons or Switches | Menu; Minus ("-"); Plus ("+"); OK; Power |
| | Languages | English, French, Spanish, Italian, German, Netherlands, Japanese, Traditional Chinese, Simplified Chinese, Brazilian Portuguese |
| | User Controls | Brightness, Contrast, Color, Image Control, OSD Control, Management features, Language, Input Select, Information and Factory Reset. |
| Signal Interface/ Performance | Horizontal Frequency | 24 to 94 kHz |
| | Vertical Frequency | 50 to 76 Hz |
| | Native Resolution | 1920 x 1080 @ 60Hz |
| | Preset VESA Graphic Modes (non-interlaced) | 640 x 480 @ 60Hz |
| | | 720 x 400 @ 70Hz |
| | | 800 x 600 @ 60Hz |
| | | 1024 x 768 @ 60Hz |
| | | 1280 x 720 @ 60Hz |
| 1280 x 1024 @ 60Hz | | |
| 1440 x 900 @ 60Hz | | |
| 1600 x 900 @ 60Hz | | |
| 1680 x 1050 @ 60Hz | | |
| 1920 x 1080 @ 60Hz | | |
| Maximum Pixel Clock Speed | 170 MHz | |
| User Programmable Modes | Yes (10) | |

Technical Specifications

| | | | |
|---------------------------------------|--|---|--|
| | Anti-Glare | Yes | |
| | Default Color Temperature | 6500 K | |
| Touchscreen Specifications | Touch Panel Type | Optical 5-point | |
| | Positional Accuracy | ±1.0 mm for all areas of touchable active area | |
| | Resolution Accuracy | 32767 x 32767 | |
| | Touch Activation Force | n/a | |
| | Optical Light Transmission (per ASTM D1003) | Normal Glass: 788% | |
| | Electrostatic Projection (per EN6100-4-2, 1955) | Air +/- 8KV | |
| | Video/Other Inputs | Plug and Play | Yes |
| Input Connectors | | DVI-D, DisplayPort 1.2 (HDCP support) | |
| USB | | USB connection for touch and webcam functions only | |
| Included Cables | | (1) DVI-D, (1) DisplayPort, (1) Audio. (1) USB | |
| Cable Lengths | | 1,8 m (5.9 ft) | |
| Audio | | Internal 2W per channel speakers; headphone jack and dual microphones | |
| Webcam | | Integrated 720p webcam | |
| Power | Power Supply | Internal | |
| | Input Power | 90 - 265 VAC at 45 - 63 Hz | |
| | Typical Power Consumption | 25 W | |
| | Maximum | 33 W | |
| | Power Saving | 0.5 W | |
| | Power Cable Length | 1,9 m (6.2 ft) | |
| | Mechanical | Dimensions (W x D x H) | Unpacked w/stand |
| Unpacked w/o stand (head only) | | | 59.93 x 4.05 x 40.92 cm (23.6 x 1.6 x 16.1 in) |
| Packaged | | | 68 x 13,9 x 50.7 cm (26.8 x 5.5 x 20 in) |
| Weight | | Head Only | 5,5 kg (12.1 lb) |
| | | Unpacked with stand | 6,5 kg (14.3 lb) |
| | | Packaged | 8,5 kg (18.7 lb) |
| Tilt Range | | +15 to +70° | |
| Swivel Range | | N/A | |
| Height Adjustable | | N/A | |
| Pivot Rotation | | N/A | |
| Base | Yes; removable easel stand | | |
| Environmental | Temperature - Operating | 5° to 35° C (41° to 95° F) | |

Technical Specifications

| | |
|---|---------------------------------------|
| Temperature - Non-operating | -20° to 60° C (-4° to 140° F) |
| Humidity - Operating | 20% to 80% non-condensing |
| Humidity - Non-operating | 5% to 95%, 38.7° C max wet-bulb |
| Altitude - Operating | 0 to 5,000 m (16,404 ft) |
| Altitude - Non-operating | 0 to 12,192 m (0 to 40,000 ft) |
| White LED Backlights | Yes |
| CCFL Panel | No |
| Arsenic-Free Display Glass | Yes |
| Low Halogen⁴ | Yes |
| Mercury- Free Display Backlighting | Yes |

Environmental Data

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- TCO or TCO Certified Edge
- EPEAT® Gold registered in the United States. See <http://www.epeat.net> for registration status in your country

Energy Consumption (in accordance with US ENERGY STAR® test method)

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|---------------------|---------------------|---------------------|
| Normal Operation | 19.42 W | 19.49 W | 19.46 W |
| Sleep | 0.39 W | 0.4 W | 0.39 W |
| Off | 0.26 W | 0.27 W | 0.25 W |

Heat Dissipation*

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|---------------------|---------------------|---------------------|
| Normal Operation | 66 BTU/hr | 67 BTU/hr | 67 BTU/hr |
| Sleep | 1 BTU/hr | 1 BTU/hr | 1 BTU/hr |
| Off | 1 BTU/hr | 1 BTU/hr | 1 BTU/hr |

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per

Technical Specifications

| | | |
|----------------------------|------------------|---|
| | | ISO 11469 and ISO1043. |
| | | <ul style="list-style-type: none">• This product contains 14.4 % post-consumer recycled plastic (by wt.)• This product is 98.4 % recycle-able when properly disposed of at end of life. |
| Packaging Materials | External: | PAPER/Cardboard & misc 750 g |
| | Internal: | PLASTIC/Polyethylene low density 30 g |
| | | PLASTIC/EPS (Expanded Polystyrene) 300 g |
| | | PLASTIC/EPE-Expanded Polyethylene 120 g |
| RoHS Compliance | | Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive). |
| Material Usage | | This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf): <ul style="list-style-type: none">• Asbestos• Certain Azo Colorants• Certain Brominated Flame Retardants - may not be used as flame retardants in plastics• Cadmium• Chlorinated Hydrocarbons• Chlorinated Paraffins• Formaldehyde• Halogenated Diphenyl Methanes• " Lead carbonates and sulfates• Lead and Lead compounds• Mercuric Oxide Batteries• Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.• Ozone Depleting Substances• Polybrominated Biphenyls (PBBs)• Polybrominated Biphenyl Ethers (PBBEs)• Polybrominated Biphenyl Oxides (PBBOs)• Polychlorinated Biphenyl (PCB)• Polychlorinated Terphenyls (PCT)• Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.• Radioactive Substances• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) |
| Packaging | | HP follows these guidelines to decrease the environmental impact of product packaging: |

Technical Specifications

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Options (sold separately)

HP LCD Monitor Quick Release - Part number EM870AA¹

An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.

HP USB Graphics Adapter - Part number NLS71AA

Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.

HP Business PC Security Lock Kit - Part number PV606AA

Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.

Technical Specifications

| | | |
|-------------------------------------|---|--|
| | HP Single Monitor Arm - Part number BT861AA | The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation - all at your fingertips -- helping you stay comfortable and productive throughout the day. |
| | HP Adjustable Stand for Touch Monitors - Part Number A1X81AA | A height adjustable stand supporting touch monitors. <ul style="list-style-type: none">• Allows the monitor to be set on a counter or cash drawer• Ruggedized, small footprint maximizes counter space for employees and customers• Height and tilt adjustments help you customize positioning to best meet your environment's needs |
| What's in the box? | Monitor and Accessories | HP S 230tm Touch Monitor; DVI-D cable; DisplayPort cable; USB cable; Audio cable; AC Power cable |
| | Documentation | Documentation kit with CD |
| | Featured Software | HP Display Assistant software; HP YouCam software |
| Other | User Guide Languages | English, Arabic, Bahasa Indonesia, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish, Turkish. |
| | Warranty Languages | English, Arabic, Bahasa Indonesia, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish, Turkish. |
| | Color | Black and Silver |
| | VESA External Mounting | Yes (one set of standard 4-hole pattern, 100 mm) |
| | Security Lock-Ready | Yes |
| | Country of Origin | China |
| Certification and Compliance | | CB, CE, TUV-S, EAC, CUL, FCC, CSA, NOM, S-Mark, VCCI, PSB, ISC, CCC, BSMI, C-Tick, E-Standby, eK, CECP, ENERGY STAR®, EPEAT® Gold ³ , CEL Grade 1, TCO Certified, SmartWay Transport Partnership (NA), Microsoft WHQL Certification. |
| Compatibility | | Compatible with platforms using the VESA standard video modes. Recommended for use with HP products. |
| Service and Warranty | | Protected by HP, including a 3 year standard limited warranty. Optional Care Pack Services are extended service contracts which go beyond your standard warranties. ² |

Technical Specifications

ENERGY STAR® is a US registered mark of the United States Environmental Protection Agency.

1. High-definition (HD) content is required to view high-definition images. Full HD panel has 1920 x 1080 resolution.
2. HP Care Pack Services are sold separately. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/go/cpc for details.
3. EPEAT® Gold registered models of this product are available where HP registers commercial display products. See www.epeat.net for registration status in your country.
4. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.