


Overview

The NC7771 supports 10/100/1000Mbps Ethernet speeds as well as a PCI-X 64-bit/133MHz data path and it is backwards compatible with existing PCI bus architectures. Additionally, the NC7771 ships with support for PCI Hot Plug, Network Fault Tolerance, Load Balancing, Jumbo Frames, PXE, Cold Boot Wake-on-LAN (WOL), and various offload capabilities that improve performance. These improvements in speed and throughput come at a cost-effective price for environments using Category 5 (or better) twisted-pair cabling.

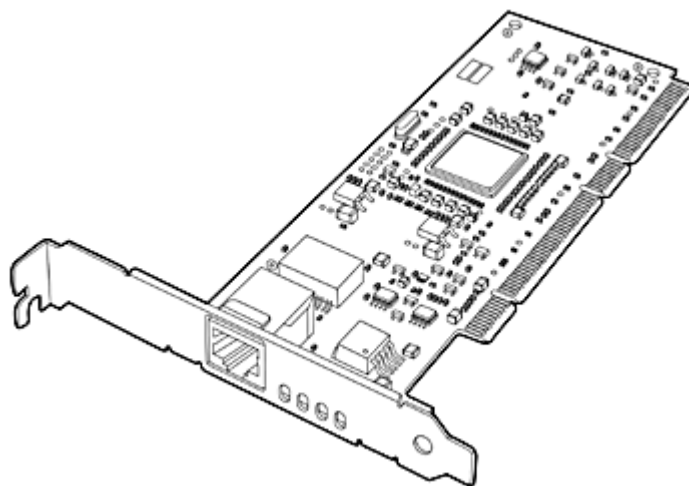

Models

HP NC7771 PCI-X 1000T Gigabit Server Adapter

290563-B21

The NC7771 is a single port copper, PCI-X, Gigabit Ethernet server adapter that runs over Category 5 (or better) twisted-pair cabling. Along with all the advanced features that HP ProLiant customers have come to expect, the NC7771 includes support for teaming for failover and load balancing, jumbo frames, Dual Address Cycles (DAC), Pre-Boot Execution Environment (PXE), PCI hot plug, large send offload capability, cold boot WOL, and multiple VLAN tagging.

Kit Contents

- NC7771 PCI-X 1000T Gigabit Server Adapter
- CD containing Drivers, User Guide, and Installation and Diagnostic Utilities
- Quick Install Card
- Product Quality Statement
- Product Warranty Statement

Performance

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA0-6064ENW.pdf>.

Gigabit Ethernet Throughput Up to 1000Mbps Ethernet transfer rate delivers outstanding network performance that improves response time and removes bottlenecks across the entire network.

PCI-X Data Path HP was an early champion of PCI-X bus technology and has played a key role in the development and industry adoption of the PCI-X specification. The PCI-X , 64-bit/133MHz data path of the NC7771 yields faster transmission with lower CPU utilization than smaller bus architectures.

Load Balancing Transmit Load Balancing (TLB) and Switch-Assisted Load Balancing (SLB) are two advanced features used to build a bigger pipe for improved networking bandwidth. These port bonding techniques enable users to install up to eight NC7771 adapters in a HP ProLiant server and aggregate their throughput up to a theoretical maximum of 16Gigabits per second full-duplex transmission.

Jumbo Frames Jumbo Frames (also known as Extended Frames) offer a 9K byte maximum Transmission Unit, which is six times the size of traditional Ethernet frames. The NC7771 supports jumbo frames as a way to achieve higher throughput and better CPU utilization when deployed in a network infrastructure that supports them. Jumbo frames are particularly useful for database transfers and tape backups.

TCP Offloads and Interrupt Coalescing The NC7771 features TCP Checksum Offloads as well as TCP Segmentation Offloads and Interrupt Coalescence. These features reduce the load on the CPU for overall improved system response. Interrupt Coalescence is a feature that groups multiple packets and issues a single interrupt to the host. This process optimizes host efficiency, leaving the CPU available for other duties.

Scalability and Reliability

Tri-Speed Support

Because the NC7771 supports both 10Mbps Ethernet and 100Mbps Fast Ethernet in addition to Gigabit Ethernet, users are guaranteed end-to-end protocol support across their enterprise. Like all HP server adapters, the NC7771 adheres to open industry standards, insuring that it will work seamlessly with any network devices that also support IEEE standards.

PCI-X Support for Traditional PCI slots

PCI-X technology insures hardware investment protection by retaining backward compatibility with the standard PCI bus architecture at the device and driver level. When the NC7771 is used in a 64/100, 64/66, 64/33, or 32/33 IO slot, the performance is limited to the maximum of those conventional bus architectures.

Network Fault Tolerance (NFT)

Network Fault Tolerance, sometimes called "failover" or "NIC redundancy," allows for the installation of multiple NC7771 server adapters or other network adapters so that the active device can be backed up by a redundant adapter to improve availability. HP's teaming utility also allows users to specify that when a failed adapter is fixed and replaced, the original adapter resumes its function as the primary network connection.

PCI Hot Plug

The NC7771 ships with PCI Hot Plug support, which enables it to be replaced or added to a PCI Hot Plug compatible server without powering down the system. This feature provides increased system availability and non-stop serviceability in business-critical computing environments.

Operating System Support

- 32-bit Windows
 - Microsoft Windows Server 2003 Standard, Web, Small Business, and Enterprise Editions
 - Microsoft Windows 2000 Server and Advanced Server
- 64-bit Windows
 - Microsoft Windows Server 2003 Standard and Enterprise Editions
 - Microsoft certified miniport and teaming drivers
- Red Hat Enterprise Linux
- SUSE Linux Enterprise Server
- Novell NetWare 6
- Novell NetWare 6.5
- Novell Open Enterprise Server x86
- SCO UnixWare 7.1.3
- SCO UnixWare 7.1.4
- SCO OpenServer 5.0.7
- SCO OpenServer 6.0.0
- Solaris 9
- Solaris 10
- NDIS 2 for DOS unattended operating system install (43K or less in size)

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix: <http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>

Scalability and Reliability

Warranty

Maximum

The remaining warranty of the HP product in which it is installed (to a maximum three-year, limited warranty).

Minimum

One year limited warranty.

See Internet address <http://www.HP.com> for overall information on Hewlett-Packard Company. For further information on HP products, contact HP Sales at 1-800-544-5255 or the HP Technical Support Center (post sales) at 1-800-652-6672. For customer support and information about HP and its products, call 1-800-OK-HP.

Network Management

Auto-negotiation The NC7771 automatically senses and configures itself to the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router at the other end of the cable.

Management Support Like all HP server adapters, the NC7771 ships with drivers and agents that can be managed from all versions of HP Insight Manager, as well as using any management application that supports SNMP.

Server Integration HP's SmartStart configuration utility includes setup support for the NC7771 so the adapter can be configured as part of the SmartStart configuration process. HP Insight Manager can recognize the NC7771 individually or in port-bonded teams, and can collect and report SNMP statistics on the adapter events. Additionally, Integrated Management Log (IML) support is provided by the NC7771 for critical event logging on HP servers.

Configuration Utilities Each NC7771 ships with a set of utilities that allow the user to:

- Enable initial diagnostics within Windows, Linux, Netware, and DOS operating systems.
- Configure network adapter teaming in a Windows environment. The Windows adapter teaming configuration utility includes a patented teaming GUI for Microsoft Windows 2000 and 2003 operating systems. Support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

LED Indicators Bracket LED indicators show link integrity, network activity, and network speed for easy troubleshooting.

Related Options

Additional Gigabit Server Adapters	HP NC110T PCI Express Gigabit Server Adapter	434905-B21
	NOTE: Does not support Windows 2000.	
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
	NOTE: Does not support Windows 2000.	
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21	
HP NC7170 PCI-X Dual Port 1000T Gigabit Server Adapter	313881-B21	
<hr/>		
10 Gigabit Server Adapters	HP NC510C PCIe 10 Gigabit Server Adapter	414129-B21
	NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.	
	HP NC510F PCIe 10 Gigabit Server Adapter	414126-B21
	NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.	

Technical Specifications

Compliance	IEEE 802.3u, 802.3x, 802.3ab, Dynamic 802.3ad, 802.1p, and 802.1q PCI-X 1.0 PCI 2.2 ACPI v1.1a	
General Specifications	Communications Processor	Broadcom 5703
	On-board memory	96KB
	Data rate	10/100/1000 Mbps, Half- and full-duplex
	Data path	64-bit/133MHz, compatible with 64/100, 64/66, 64/33 and 32/33
	Interrupt levels	INTA
	Bus architecture	PCI-X bus-mastering, compatible with existing PCI bus architectures
	Connector	RJ-45
	Distance	Up to 328 ft (100 m)
	Wiring	Category 5 or higher UTP
	Dimensions (LxW)	6.6 x 2.5 in (16.8 x 6.4 cm)
Power and Environmental Specifications	Operating	Temperature 32° to 131° F (0° to 55° C) Humidity 5% to 95% non-condensing
	Non-operating	Temperature -40° to 149° F (-40° to 65° C) Humidity 5% to 95% non-condensing
	Power requirement	1A @ 5V max
	Emissions Classifications	Class B
	Agency Approvals	USA: FCC (CFR 47 part 15) and UL 60950 Canada: ICES-003 and CSA60950 Japan: VCCI Korea: MIC (RRL), EMC Registration Australia: ACA, AS/NZS3548/EN55022:1998, EN55024:1998 EU: EN55022:1998 (CISPR 22), EN55024:1998, and IEC60950:1999 (EN60950:2000)

Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
---	---	---

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows are US registered trademarks of Microsoft Corporation. Unix is a registered trademark of The Open Group.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.