


The Smartest Choice For Seamless Innovation

SUPER NARROW BEZEL DISPLAY 47WV50MS(BR)




SLIMMER BEZEL

4.9mm, the slimmest bezels create powerful and impactful video walls.

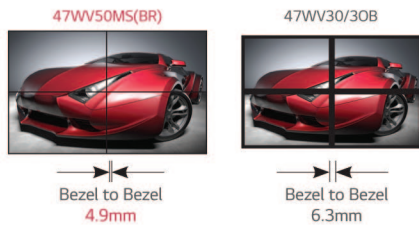

AUTO CALIBRATION

WV Series provide Automatic Calibration solution which enables to save time and labor on installation by adjusting the white balance on videowall easily.

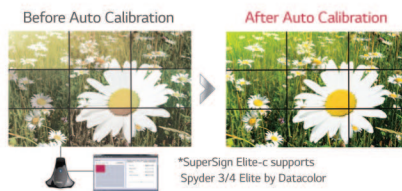

AUTO HIGHER RESOLUTION


WV50 supports Full HD. You can enjoy super fine image from each and every displays composing videowall.



IPS SUPERB PICTURE QUALITY


NO BLACKENING DEFECT

Hardly affected by light or heat, hence no blackening.

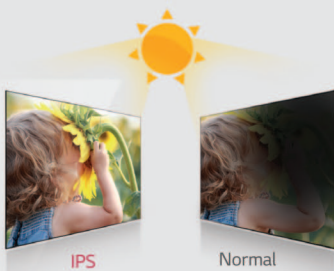


TRUE WIDE

No color changes or distortion from any viewing angle.

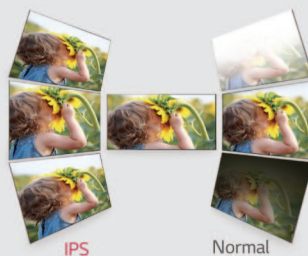

STABLE PANEL

When touch the screen, it can also display consistently with leaving no mark.

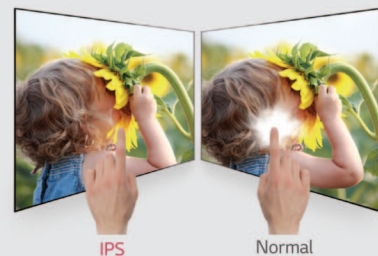

SUPER NARROW BEZEL DISPLAY

47WV50MS(BR) 47F"



- Brightness : 500nit (47WV50BR) / 800nit (47WV50MS)
- Shine-out (47WV50MS)
- Super Narrow Bezel (Bezel to Bezel: 4.9mm)
- 24 hours / 7 days Operation Support
- Monitor Control & Auto Calibration Solution
- Low Power Consumption



FEATURES

- Shine-out (47WV50MS)
- Panel Size : 47"
- Bezel to Bezel Size : 4.9mm
- Slim Depth : 90mm under
- Tile Mode : 15 x 15
- USB Playback → Low cost media player



- Low Screen Temperature on Standard Mode
- High Resistance to Blackening Defect
- Wide Viewing Angle

SPECIFICATIONS

47WV50MS(BR)

PANEL	screen size	47F"
Panel Technology	IPS (LED BLU)	
Aspect Ratio	16 : 9	
Native Resolution	1,920 x 1,080 (FHD)	
Brightness	800nit(47WV50MS) / 500nit(47WV50BR)	
Contrast Ratio	1,400 : 1	
Dynamic CR	500,000 : 1	
Viewing Angle (H x V)	178 x 178	
Response Time	12ms (Typ.)	
CONNECTIVITY	Input (Rear)	
Digital	DVI-D(1), HDMI(1) with HDCP for all input, Display Port(1)	
Analog	RGB(1), Component(RGB Shared), AV(BNC, 1)	
Audio	PC Audio In(1), AV/Component Audio In(RCA, 1)	
External Control	RS232C(1), RJ45(1), IR Receiver(1)	
USB	USB(1)	
Output (Rear)		
Digital	DVI-D(1)	
Analog	RGB(1)	
Audio	External speaker(1)	
External Control	RS232C(1)	
AUDIO		
Auto Volume	No	
Balance	Yes	
Audio Power	20W (10W x 2)	
Speaker On/off	Yes	
Clear Voice II	Yes	
Sound mode	Standard, Music, Cinema, Sports, Game	

PHYSICAL SPECIFICATION	Monitor Dimension(W x H x D)	1044.9mm x 590mm x 89.9mm
Weight(head)	18.7kg (47WV50MS), 18.5kg (47WV50BR)	
Carton Dimensions(W x H x D)	1180mm x 165mm x 770mm	
Packed Weight	23.7kg (47WV50MS), 23.5kg(47WV50BR)	
Handle	Yes	
VESA™ Standard Mount Interface	600 x 400	
SPECIAL FEATURES	Additional	Temp Sensor, 15 x 15 Tile Mode, 2 types of Handle, USB Playback
ENVIRONMENT CONDITIONS	Operation Temperature	0°C - 40°C
Operation Humidity	10% - 90%	
POWER	Power Consumption	
Typ.	160W (47WV50MS), 150W (47WV50BR)	
Smart Energy Saving	90W (47WV50MS), 80W (47WV50BR)	
DPM	0.7W	
Power Off	0.5W	
SOFTWARE COMPATIBILITY	Supersign Compatibility	Elite-w / Elite-w lite (Only control)

47WV50BR 47F"