

BELKIN®


OmniView® PR03 USB & PS/2 KVM Switch



Control multiple USB and PS/2 servers from a single console

The OmniView PRO3 USB & PS/2 KVM Switch provides easy and dependable server control with extraordinary performance. The Switch enables network administrators to monitor and control up to four, eight, or 16 USB- and PS/2-platform servers from a single console. No other KVM switch provides such an impressive set of features and value price. The PRO Series KVM Switches are the industry's most popular KVM switches for small-to-medium server rooms, branch locations, and test and development labs. Designed to grow along with your server network, the Switch can be daisy-chained together with other Belkin SMB KVM Switches and is also compatible with the OmniView PRO2 Series KVM Switch to support up to 256 servers.

Features	Benefits
USB & PS/2 Connection	Expanded connectivity in a mixed server environment
On-Screen Display (OSD)	Simplifies server management and allows you to assign names to each connected server
Dedicated Daisy-Chain Ports	Let you easily expand your KVM configuration, without sacrificing available CPU ports
Dual-Port Micro-Cabling	Provides cable management that reduces cable clutter by 55%, when compared to conventional KVM cabling
Hot Keys	Allow you to easily switch servers using a sequence on your keyboard
Front-Panel Port Selectors	Allow you to manually select servers at the rack
AutoScan	Lets you scan and monitor the activities of all connected servers
Flash-Upgradeable Firmware	Ensures compatibility with the latest hardware
1U Design	Allows for desktop or 1U rack-mountable installation
Single User	Designed for SMB server rooms
Added Security	Specify user names and passwords to prevent unauthorized access

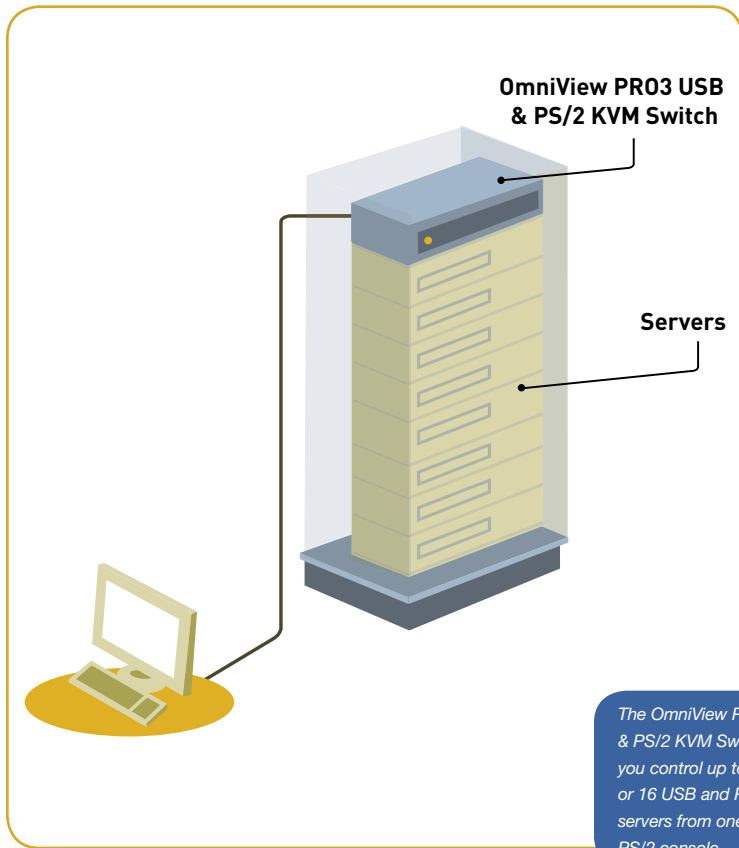

```

PORT  NAME
BANK : 1
0 1 *SYSTEM 0 1
0 2 *SYSTEM 0 2
0 3 *SYSTEM 0 3
0 4 *SYSTEM 0 4
0 5 *SYSTEM 0 5
0 6 *SYSTEM 0 6
0 7 *SYSTEM 0 7
0 8 *SYSTEM 0 8

F1 : MENU
F2 : LOGOUT
F3 : PREV
ESC : QUIT
ENTER : COMPLETE
+ / : SELECT

Pg Up / Pg Dn :
BANK SELECT

USER :
ADMIN
SCAN TIME :
T O S E C
    
```

On-Screen Display

Simplifies server configuration, control, monitoring, and switching. Allows you to assign names to all connected servers.

The OmniView PRO3 USB & PS/2 KVM Switch lets you control up to 4, 8, or 16 USB and PS/2 servers from one USB or PS/2 console.


Specifications

Model No.	F1DA104Z	F1DA108Z	F1DA116Z
No. of Users Supported	1	1	1
No. of Servers Supported	4	8	16
Daisy-Chain	Maximum of 16 Switches*	Maximum of 16 Switches*	Maximum of 16 Switches*
Enclosure	Metal with plastic faceplate	Metal with plastic faceplate	Metal with plastic faceplate
Dimensions	11 (W) x 1.75 (H) x 6 (L) in. (279 x 44.5 x 150mm)	17.25 (W) x 1.75 (H) x 7.5 (L) in. (438 x 45 x 190mm)	17.25 (W) x 3.5 (H) x 7.5 (L) in. (438 x 89 x 190mm)
Weight	5.2 lbs. (2.4kg.)	9.2 lbs. (4.2kg.)	12 lbs. (5.4kg.)
KVM Cables Included	None	None	None
Power/Environment			
Power Requirements	12V DC, 1A power adapter		
Operating Temperature	32° to 104° F (0 to 40° C)		
Storage Temperature	-4° to 140° F (-20 to 60° C)		
Hardware Supported			
Monitors	CRT and LCD (with VGA support)		
Keyboard/Mouse	USB, PS/2		
Video Resolution	Up to 1920x1440 @ 75Hz		
Operating Systems	Windows® NT®, 2000, XP, Server 2003, and Vista™; Microsoft® DOS 5.x and above; Red Hat® Linux® 8.x and above; Novell® NetWare® 5.x; Mac OS® X; Sun™ Solaris™		
Ports			
Daisy-Chain	DB25 female		
Console	HDDDB15 female (VGA), USB (Type A), miniDIN6 (PS/2)		
Servers	SCSI-50		
Flash Upgrade	RJ11		
Warranty			
3 years			

*May be daisy-chained with up to 15 OmniView PRO Series and SMB KVM Switches.

Package Contents

OmniView PRO3 USB & PS/2 KVM Switch
 Rack-Mount Brackets with Screws (F1DA108Z, F1DA116Z only)
 DB9-to-RJ11 Serial Flash Cable
 User Manual
 Quick Installation Guide
 12V DC, 1A Power Adapter

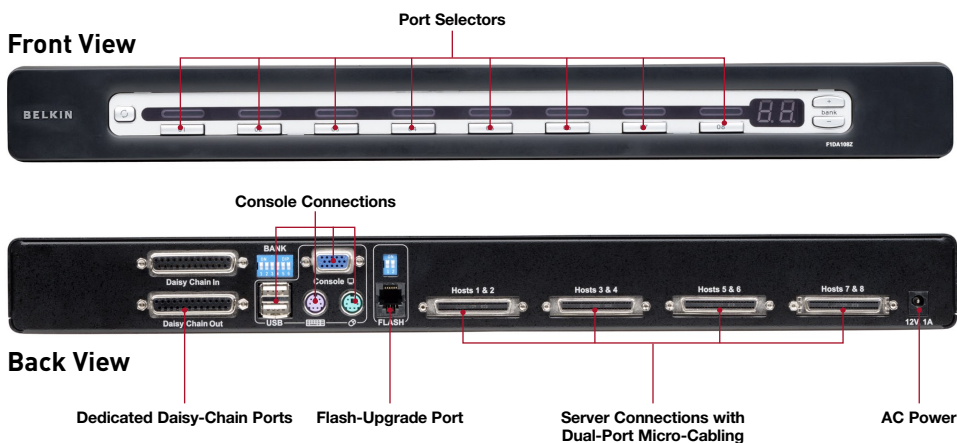

Recommended Cables:



All-In-One USB KVM Cable Kit

Connects your servers to the Switch. Belkin cables offer the highest quality possible to ensure optimal data and video transmission. Cable Kits are sold separately for models F1DA104Z , F1DA108Z , and F1DA116Z. One Cable Kit is required for every two servers connected.

F1D9401-06 Dual-Port KVM Cable, 6 ft., USB
F1D9401-12 Dual-Port KVM Cable, 12 ft., USB



All-In-One PS/2 KVM Cable Kit

Connects your servers to the Switch. Belkin cables offer the highest quality possible to ensure optimal data and video transmission. Cable Kits are sold separately for models F1DA104Z, F1DA108Z, and F1DA116Z. One Cable Kit is required for every two servers connected.

F1D9400-06 Dual-Port KVM Cable, 6 ft., PS/2
F1D9400-10 Dual-Port KVM Cable, 10 ft., PS/2
F1D9400-15 Dual-Port KVM Cable, 15 ft., PS/2
F1D9400-25 Dual-Port KVM Cable, 25 ft., PS/2



Daisy-Chain Cable

Allows you to connect multiple Switches together to expand your server configuration.

F1D108-CBL Daisy-Chain Cable, 2 ft.
F1D108-CBL-06 Daisy-Chain Cable, 6 ft.
F1D108-CBL-10 Daisy-Chain Cable, 10 ft.
F1D108-CBL-15 Daisy-Chain Cable, 15 ft.
F1D108-CBL-20 Daisy-Chain Cable, 20 ft.
F1D108-CBL-25 Daisy-Chain Cable, 25 ft.

Part Number

F1DA104Z
F1DA108Z
F1DA116Z

Description

OmniView PRO3 4-Port USB & PS/2 KVM Switch
OmniView PRO3 8-Port USB & PS/2 KVM Switch
OmniView PRO3 16-Port USB & PS/2 KVM Switch

Note: Specifications are subject to change without notice.

BELKIN[®]

www.belkin.com

Belkin International, Inc.
310-898-1100
Los Angeles, CA 90220, USA

Belkin Ltd.
+44 (0) 1933 35 2000
Rushden, United Kingdom

Belkin Ltd.
+61 (0) 2 4350 4600
Tuggerah, Australia